

# V730 "Double Female" Flexible Pipe

**Builder's Best, Inc.**  
 201 Broiles Drive • Jacksonville, TX 75766  
 1-8-U VENT SAFE (1-888-368-7233) or 903-586-8283  
 FAX 1-800-259-VENT (1-800-259-8368) or 903-586-9370  
 Internet: www.buildersbest.com




## Description

- *Non-insulated flexible aluminum air duct, aluminum roll formed with crimp-locked airtight seam.*
- *Designed for use in general purpose venting where a UL 181 listing is not required.*
- *Universal female fittings for smooth taped seams.*
- *Class 0 air duct, flexible.*




## Product Specs

- 8' length
- 3" and 4" diameter
- Compressed to 24"
- Female collars
- Collars overlap for smooth taped seams
- Available with and without clamps

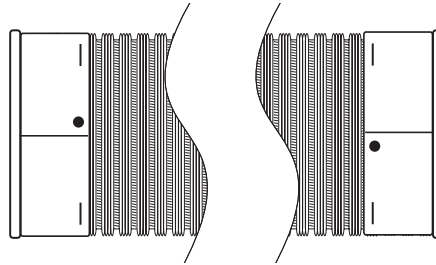

## Airflow

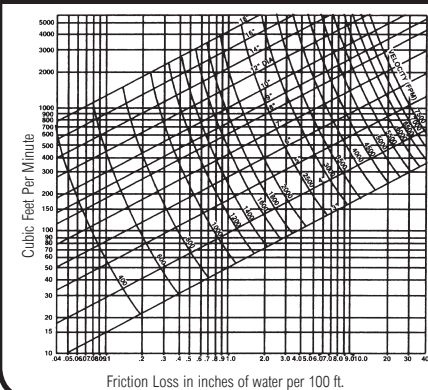

## Performance Data

Pressure Rating:

Positive: 6" WC max  
 Negative: 6" WC max

Maximum velocity: 5,000 FPM

Temperature Range: -30°F to + 430°F

Flame Spread 0  
 Smoke Developed 0

**INSTALLATION:** Air duct connections and joints shall be made per installation instructions outlined by Builder's Best. (Installation instructions are included inside each carton.)

## Warranty

**WARRANTY EXCLUSION AND DISCLAIMER** Seller specifically excludes, and hereby disclaims any express representation or express warranty of any kind with respect to the goods ordered hereunder. All implied warranties, including without limitation merchantability or fitness for a particular purpose or arising from a course of dealing or usage or trade shall expire and cease 45 days after date of delivery. Seller shall not be liable to buyer or any third party for any special, secondary, incidental, or consequential damages however arising. Nothing in this provision shall invalidate or restrict any right or remedy otherwise available under state or federal law. Materials and specifications subject to change without notice

## Labels